



MULTI-MONTI®-plus

European Technical Assessment ETA-15/0784

Mechanical fasteners for use in concrete



Approval body for construction products
and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and
Laender Governments



European Technical Assessment

ETA-15/0784
of 2 June 2021

English translation prepared by DIBt - Original version in German language

General Part

Technical Assessment Body issuing the
European Technical Assessment:

Deutsches Institut für Bautechnik

Trade name of the construction product

MULTI-MONTI-plus

Product family
to which the construction product belongs

Mechanical fasteners for use in concrete

Manufacturer

HECO-Schrauben GmbH & Co. KG
Dr.-Kurt-Steim-Straße 28
78713 Schramberg
DEUTSCHLAND

Manufacturing plant

HECO-Schrauben GmbH & Co. KG
Werk Schramberg

This European Technical Assessment
contains

19 pages including 3 annexes which form an integral part
of this assessment

This European Technical Assessment is
issued in accordance with Regulation (EU)
No 305/2011, on the basis of

EAD 330232-01-0601, Edition 05/2021

This version replaces

ETA-15/0784 issued on 23 April 2018

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

Specific Part

1 Technical description of the product

The Screw anchor MULTI-MONTI-plus is an anchor in size 6, 7.5, 10, 12, 16 and 20 mm made of galvanised or stainless steel. The anchor is screwed into a predrilled cylindrical drill hole. The special thread of the anchor cuts an internal thread into the member while setting. The anchorage is characterised by mechanical interlock in the special thread.

Product and product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic resistance to tension load (static and quasi-static loading)	See Annex C 1 and C 2
Characteristic resistance to shear load (static and quasi-static loading)	See Annex C 1 and C 2
Displacements	See Annex C 6 and C 7
Characteristic resistance and displacements for seismic performance categories C1 and C2	See Annex C 3 and C 4

3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Class A1
Resistance to fire	See Annex C 5

3.3 Aspects of durability linked with the Basic Works Requirements

Essential characteristic	Performance
Durability	See Annex B 1

English translation prepared by DIBt

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with the European Assessment Document EAD 330232-01-0601 the applicable European legal act is: [96/582/EC].

The system to be applied is: 1

5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document


Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited at Deutsches Institut für Bautechnik.

Issued in Berlin on 2 June 2021 by Deutsches Institut für Bautechnik


Dipl.-Ing. Beatrix Wittstock
Referatsleiterin

beglaubigt:
Tempel



Installed condition

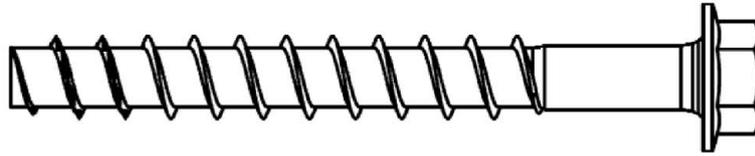

MMS-plus / carbon steel

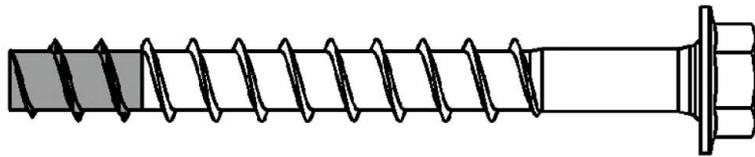

MMS-plus / stainless steel

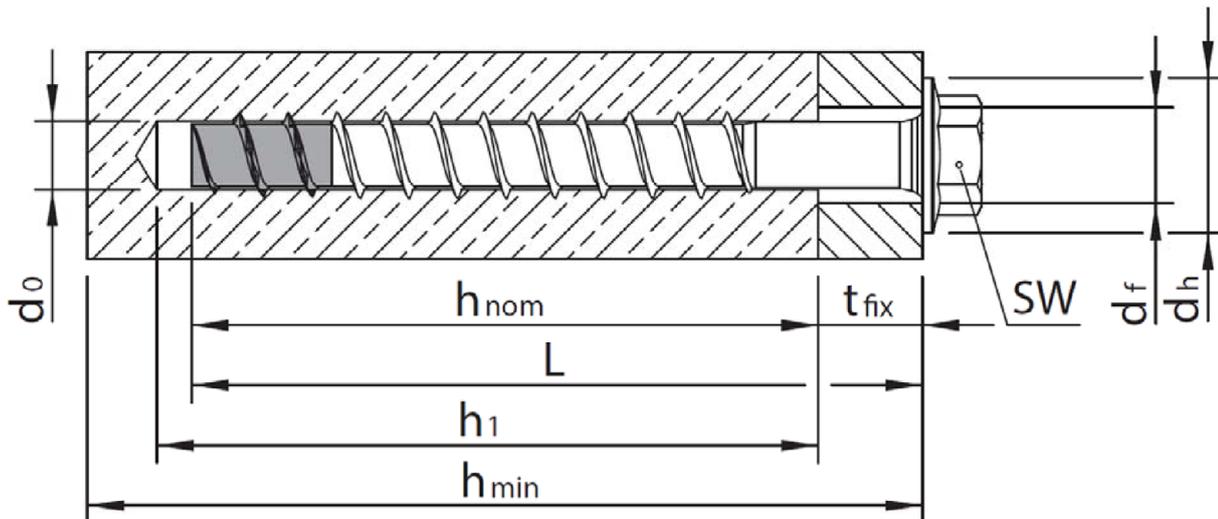

e.g. MMS-plus A4 SS stainless steel with hexagon head and washer







- d_0 = nominal borehole diameter
- h_{nom} = nominal anchorage depth
- h_1 = borehole depth
- h_{min} = minimum thickness of concrete member
- t_{fix} = thickness of fixture
- d_f = diameter of clearance hole in the fixture

MULTI-MONTI-plus

Product description
Product in the installed state

Annex A 1

Table A1: Screw types


Type	Marking
	1) Hexagon Head with and without washer (alternative design with cone under the head) (S)
	2) Hexagon Head and washer (SS)
	3) Hexagon Head and washer (alternative design with cone under the head) (SSK)
	4) PanHead, with small Pan Head (P)
	5) Mounting bar-anchor, with large Pan Head (MS)
	6) Countersunk head (F)
	7) Countersunk head with under head thread and single- or multi-start thread (FT)
	8) Cylinder Head with under head thread and single- or multi-start thread (ZT, SST & PT)
	9) Anchor with metric stud (ST)
	10) Anchor with metric stud for mounting of nuts (pre-assembled with sleeve) (I)
	11) Anchor with metric stud (V)
	12) Pan Head with under head thread and single- or multi-start thread, different diameters compared to the concrete thread (others expression possible) (DWC)
	13) Countesunk Head with under head thread, different diameters compared to the concrete thread (TC)

MULTI-MONTI-plus

Product description
Dimensions and screw types

Annex A 2

Table A2: Dimensions, materials and head markings

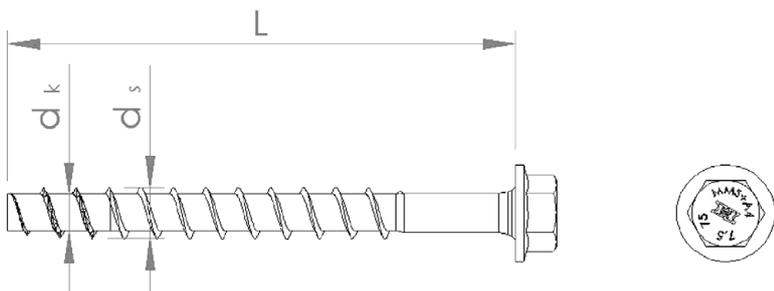carbon steel ¹⁾			Ø					
			6	7,5	10	12	16	20
Thread diameter	d _s	[mm]	6,65	7,75	10,5	12,6	16,7	21,2
Core diameter	d _k	[mm]	4,3	5,45	7,3	9,05	13,3	17,4
Length	L ≥	[mm]	35	35	50	75	100	140
	L ≤	[mm]	500	500	500	600	800	800
Rupture elongation	A ₅	[%]	≤ 8					
1) galvanized steel EN 10263-4:2001 (multi-layered coating systems are possible)								
stainless steel ²⁾			Ø					
			7,5	10	12			
Thread diameter	d _s	[mm]	7,65	10,5	12,6			
Core diameter	d _k	[mm]	5,45	7,3	9,25			
Length	L ≥	[mm]	35	60	90			
	L ≤	[mm]	500	500	500			
Rupture elongation	A ₅	[%]	≥ 8					
2) stainless steel 1.4401, 1.4462, 1.4578, 1.4529 und 1.4571 according EN 10088-1:2005								
Identification								
				Marking	Attribute			
				H	Factory sign			
				MMS+	Anchor type			
				z.B. 7,5	Anchor size			
				z.B. 75	Anchor length			
A4 + A5	additional marking for stainless steel and CRC III							
FA	additional marking for stainless steel and CRC IV							
KK	additional marking for high corrosion resistance steel and CRC V							
Materials				Marking				
carbon steel				MMS+				
1.4401 / 1.4578				MMS+ A4				
1.4462				MMS+ FA				
1.4571				MMS+ A5				
1.4529				MMS+ KK				

MULTI-MONTI-plus

Product description
Dimensions and head marking

Annex A 3

Specifications of intended use

Table B1: Use of the anchoring:

Size MMS-plus			6	7,5	10	12	16	20
Embedment depth	h_{nom}	[mm]	alle					
Head shapes			alle					
Static and quasi static loads			ok					
Fire exposure			ok					
Size MMS-plus			10	12		16	20	
Embedment depth	h_{no} m	[mm]	65	75	90	115	140	
Head shapes			1 – 13		1 – 13		1 – 13	1 – 13
Seismic actions ^{1) 2)}	C1	ok		ok		ok	ok	
	C2	no performance assessed						

¹⁾ Only Carbon Stahl (A4-/HCR-Steel not assessed)

²⁾ With head shape 9 + 10 und use of metric thread only axial seismic actions are allowed

Base Materials:

- Compacted reinforced or non-reinforced normal weight concrete without fibres according to EN 206:2013 + A1:2016
- Strength classes C20/25 to C50/60 according to EN 206:2013 + A1:2016
- Cracked and uncracked concrete

Conditions of use (Environmental conditions):

- Structures subject to dry internal conditions
- For all other conditions according to EN 1993-1-4:2015, Table A.1 corresponding to corrosion resistance classes:
 - CRC III: screw with head marking MMS+ A4, MMS+ A5
 - CRC IV: screw with head marking MMS+ FA
 - CRC V: screw with head marking MMS+ KK

Design:

- Anchorages are designed under the responsibility of an engineer experienced in anchorages and concrete work
- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e.g. position of the anchor relative to reinforcement or to supports, etc.)
- The design of the anchoring under static or quasi-static actions and fire exposure have to be carried out in accordance with EN 1992-4:2018 and EOTA Technical Report TR 055
- The design under shear load according to EN 1992-4:2018, section 6.2.2 applies to all in appendix B2, table B1 specified diameter d_f the diameter of clearance hole in the fixture

Installation:

- Hole drilling by hammer-drilling only
- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site
- After installation further turning of the anchor must not be possible
- The head of the anchor is attached to the fixture and is not damaged, respectively the required embedment depth is reached.


MULTI-MONTI-plus

Intended Use
Specification

Annex B 1

Table B2: Installation parameters MMS-plus carbon steel

Size MMS-plus			6		7,5		10		12		16		20
Embedment depth	h_{nom}	[mm]	35	45	35	55	50	65	75	90	100	115	140
Norminal drill diameter	d_0	[mm]	5		6		8		10		14		18
Drill bit cutting-Ø	$d_{cut} \leq$	[mm]	5,40		6,40		8,45		10,45		14,50		18,50
Borehole depth	$h_1 \geq$	[mm]	40	50	40	65	60	75	85	100	115	130	160
Diameter of clearance hole	$d_f \leq$	[mm]	7		9		12,5		14,5		19		23
Diameter Countersunk	d_h	[mm]	11,5		15,5		19,5		24		-		-
Min. thickness of the concrete member	h_{min}	[mm]	100		100		100	115	125	150	150		180
cracked and min. spacing	s_{min}	[mm]	30		35		35		40		60		80
uncracked min. edge concrete distance	c_{min}	[mm]	30		30		35		40		60		80
Recommended installation tool	[Nm]	Impact screw driver, max. power output T_{max} according manufacturer information											
		75	100	120	250	250	600	800					
Torque moment for threaded version (MMS-plus V)	T_{inst}	[Nm]	-		15		20		30		55	70	140

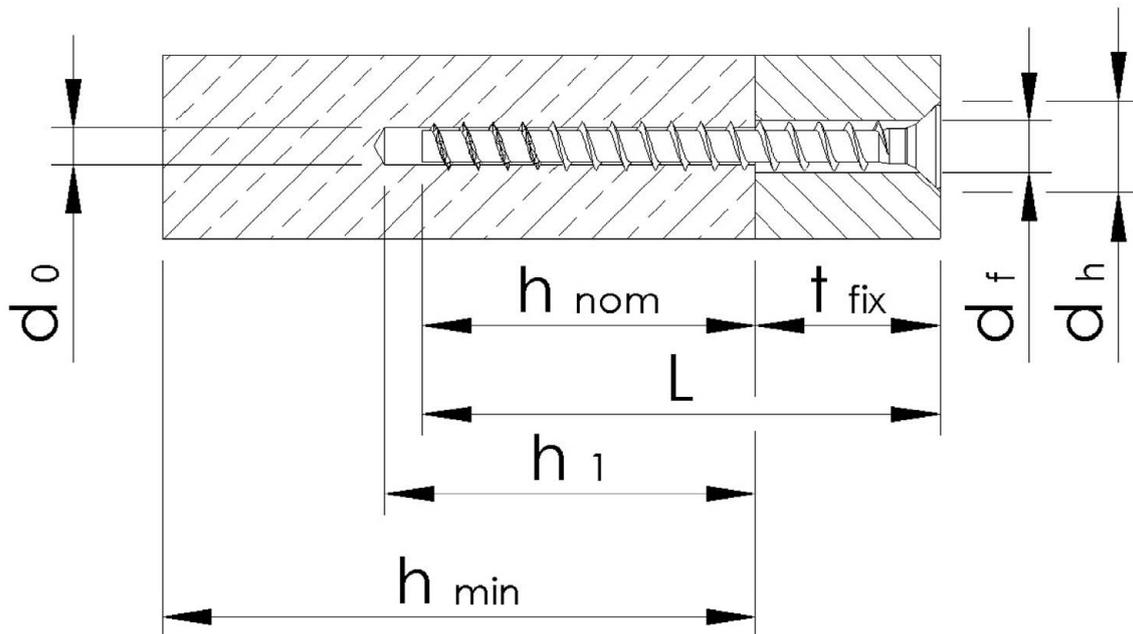

MULTI-MONTI-plus


Intended Use
Installation parameters

Annex B 2

Table B3: Installation parameters MMS-plus stainless steel

Size MMS-plus A4			7,5			10		12	
Norminal drill diameter	d_0	[mm]	6			8		10	
Drill bit cutting-Ø	$d_{cut} \leq$	[mm]	6,40			8,45		10,45	
Embedment depth $h_{nom,standard}$	h_{nom}	[mm]	40	55	75	70	85	100	115
Borehole depth with cleaning	$h_1 \geq$	[mm]	45	60	85	80	95	110	125
Borehole depth without cleaning ¹⁾	$h_1 \geq$	[mm]	$h_{nom} + 2 \times d_0$						
Borehole depth with adjustment ¹⁾	$h_{1,adj} \geq$	[mm]	-	$h_{nom,adj,0} + 10 \text{ mm}$					
Borehole depth without cleaning and with adjustment ¹⁾	$h_{1,adj} \geq$	[mm]	-	$h_{nom,adj,0} + 2 \times d_0$					
Embedment depth $h_{nom,reduced}$	h_{nom}	[mm]	35	50	65	60	75	90	105
Borehole depth with cleaning	$h_1 \geq$	[mm]	40	55	75	70	85	100	115
Borehole depth without cleaning ¹⁾	$h_1 \geq$	[mm]	$h_{nom} + 2 \times d_0$						
Borehole depth with adjustment ¹⁾	$h_{1,adj} \geq$	[mm]	-	$h_{nom,adj,0} + 10 \text{ mm}$					
Borehole depth without cleaning and with adjustment ¹⁾	$h_{1,adj} \geq$	[mm]	-	$h_{nom,adj,0} + 2 \times d_0$					
Diameter of clearance hole	$d_f \leq$	[mm]	9,0			12,5		14,5	
Diameter Countersunk	d_h	[mm]	13,6			17		21	
Min. thickness of the concrete member	h_{min}	[mm]	100			115	125	150	
cracked and uncracked concrete	min. spacing	s_{min}	35			35		40	
	min. edge distance	c_{min}	30			35		40	
Recommended installation tool		[Nm]	Impact screw driver, max. power output T_{max} according manufacturer information						
			185	200	450	600			

1) It should be ensured that the requirement for the minimum component thickness $h_{min} \geq h_1 + \Delta h$ mit $\Delta h = \max(2 \times d_0; 30 \text{ mm})$ is fulfilled.

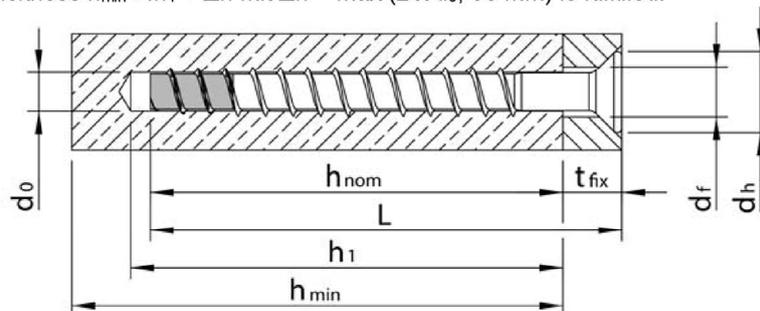


MULTI-MONTI-plus

Intended Use
Installation parameters

Annex B 3


Adjustment MMS-plus stainless steel

Borehole depth for adjustment

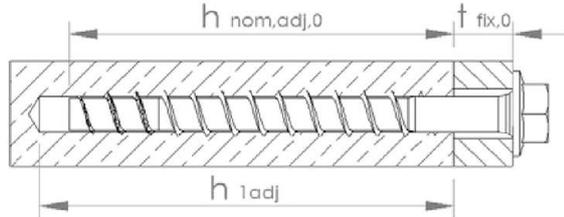


Adjustment

1. Step

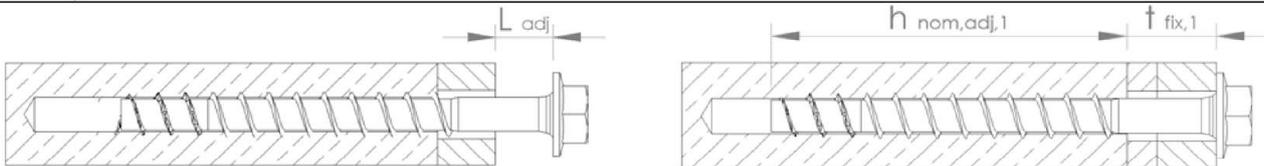

2. Step

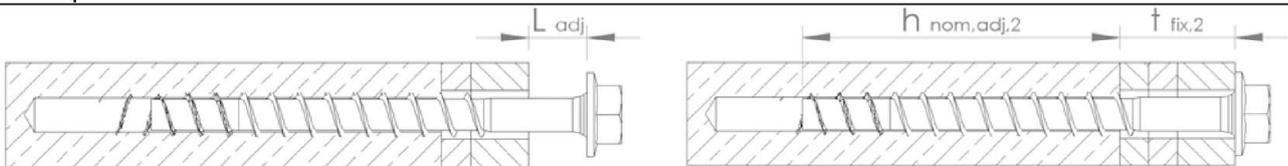

Controlling of adjustment and mounting


A screw can be adjusted maximum two times. The screw may be loosened up to a maximum $L_{adj} = 10$ mm from the surface of the attachment. The borehole depth for adjustment should be $h_{1,adj}$ (see table B3 Annex B3). The total allowed thickness of the shims added during the adjustment process is 10 mm. The final embedment depth after adjustment process must be larger or equal than h_{nom1} and h_{nom2} , or h_{nom2} and h_{nom3} for 7,5.

MULTI-MONTI-plus


Intended Use
Installation parameters

Annex B 4


Installation instructions




Note the information of the approval!




Create borehole using a Rotary Hammer.



Clean borehole, e.g. with blowing out.



Install of the screw anchor with an impact wrench or by hand.



Check: The anchor head is fully supported on the fixture and not damaged.

MULTI-MONTI-plus

Intended Use
Installation instruction

Annex B 5

Table C1: Characteristic values for static and quasi-static loading MMS-plus carbon steel

Size MMS-plus			6		7,5		10		12		16		20	
Embedment depth	h_{nom}	[mm]	35 ¹⁾	45	35 ¹⁾	55	50	65	75	90	100	115	140	140
Steel failure for tension- and shear load														
Characteristic resistance	$N_{Rk,s}$	[kN]	10,8		17,6		32,1		49,9		111,1		190,2	
Partial safety factor	$\gamma_{Ms,N}$	[-]	1,50											
Characteristic resistance	$V^0_{Rk,s}$	[kN]	4,1		6,1		13,7		24,1		50,2		85,3	
Partial safety factor	$\gamma_{Ms,V}$	[-]	1,25											
Ductility factor	k_7	[-]	0,8											
Characteristic resistance	$M^0_{Rk,s}$	[Nm]	6,7		14,1		34,5		66,8		207,6		464,3	
Pullout														
Characteristic resistance in uncracked concrete C20/25	$N_{Rk,p}$	[kN]	5,5	8	4	$\geq N^0_{Rk,c}$								
Characteristic resistance in cracked concrete C20/25	$N_{Rk,p}$	[kN]	1	1,5	2	4	6	9	12	16	20	30	44	44
Increasing factor for concrete	C30/37	Ψ_c	[-]	1,22										
	C40/50			1,41										
	C50/60			1,58										
Concrete cone failure and splitting failure														
Effective anchorage depth	h_{ef}	[mm]	26	35	26	43	36	50	57	70	77	90	114	114
Factor for	cracked	$k_{cr,N}$	7,7											
	uncracked	$k_{ucr,N}$	11,0											
Concrete cone	edge distance	$c_{cr,N}$	1,5 h_{ef}											
	spacing	$s_{cr,N}$	3 h_{ef}											
Splitting	Characteristic resistance	$N^0_{Rk,sp}$	[kN]	1	1,5	2	4	6	9	12	16	20	30	44
	edge distance	$c_{cr,sp}$	[mm]	1,5 h_{ef}										
	spacing	$s_{cr,sp}$	[mm]	3 h_{ef}										
Installation factor	γ_{inst}	[-]	1,0											
Concrete pryout failure														
k-Factor	k_8	[-]	1,0						2,0					
Concrete edge failure														
Effective length of the anchor	$l_f = h_{ef}$	[mm]	26	35	26	43	36	50	57	70	77	90	114	114
Effective diameter of the anchor	d_{nom}	[mm]	5		6		8		10		14		18	

¹⁾ Only for non-structural applications

MULTI-MONTI-plus

Performance
Characteristic values for static and quasi static tensions load

Annex C 1

Table C2: Characteristic values for static and quasi-static loading MMS-plus stainless steel

Size MMS-plus		7,5			10			12			
Steel failure for tension- and shear load											
Characteristic resistance	$N_{Rk,s}$	[kN]	16			29			45		
Partial safety factor	$\gamma_{Ms,N}$	[-]	1,4								
Characteristic resistance	$V^0_{Rk,s}$	[kN]	2	11	14	18	28	23	27		
Partial safety factor	$\gamma_{Ms,V}$	[-]	1,4								
Ductility factor	k_7	[-]	1,0								
Characteristic resistance	$M^0_{Rk,s}$	[Nm]	13,3			32,1			61,1		
Pullout											
Embedment depth $h_{nom,standard}$	h_{nom}	[mm]	40	55	75	70	85	100	115		
Characteristic resistance in uncracked concrete C20/25	$N_{Rk,p}$	[kN]	5,5	4,5	13	12	20	20	32		
Characteristic resistance in cracked concrete C20/25	$N_{Rk,p}$	[kN]	3,5	2	4	6	9	12	16		
Embedment depth $h_{nom,reduced}$	h_{nom}	[mm]	35 ¹⁾	50	65	60	75	90	105		
Characteristic resistance in uncracked concrete C20/25	$N_{Rk,p}$	[kN]	4	4	10	10	17	16	26		
Characteristic resistance in cracked concrete C20/25	$N_{Rk,p}$	[kN]	2,5	1,5	3	5	7	9,5	13		
Increasing factor for $N_{Rk,p}$											
Increasing factor for concrete	C30/37	ψ_c	[-]	1,22							
	C40/50			1,41							
	C50/60			1,58							
Concrete cone failure and splitting failure											
Effective anchorage depth	$h_{ef,standard}$	[mm]	23	36	49	44	56	65	77		
Effective anchorage depth	$h_{ef,reduced}$	[mm]	19	32	40	35	48	56	69		
Factor for	cracked	$k_{cr,N}$	[-]	7,7							
	uncracked	$k_{urc,N}$	[-]	11,0							
Concrete cone	edge distance	$c_{cr,N}$	[mm]	1,5 h_{ef}							
	spacing	$s_{cr,N}$	[mm]	3 h_{ef}							
Splitting	Characteristic resistance	$N^0_{Rk,sp}$	[kN]	$N^0_{Rk,sp} = N_{Rk,p}^{2)}$							
	edge distance	$c_{cr,sp}$	[mm]	1,5 h_{ef}							
	spacing	$s_{cr,sp}$	[mm]	3 h_{ef}							
Installation factor	γ_{inst}	[-]	1,2				1,0				
Concrete pryout failure											
k-factor for $h_{ef,standard}$	k_8	[-]	1,0					2,0			
k-factor for $h_{ef,standard}$	k_8	[-]	1,0				2,0				
Concrete edge failure											
Effective length of the anchor	l_f	[mm]	$l_f = \text{corresponding } h_{ef}$								
Effective diameter of the anchor	d_{nom}	[mm]	6			8			10		

¹⁾ Only for non-structural applications, only under dry internal conditions

²⁾ For $N_{Rk,p}$ the value in cracked concrete is decisive

MULTI-MONTI-plus

Performance

Characteristic value for seismic actions C1 and C2

Annex C 2

Table C3.1: Characteristic values for seismic actions C1 MMS-plus carbon steel

Size MMS-plus			10	12	16	20	
Embedment depth	h_{nom}	[mm]	65	75	90	115	140
Steel failure for tension- and shear load							
Characteristic resistance and partial safety factor	$N_{Rk,s,c1}$	[kN]	24,1	37,4	100,0	142,7	
	$\gamma_{Ms,c1}$	[-]	1,5				
	$V_{Rk,s,c1}$	[kN]	9,6	16,9	45,2	91,0	
	$\gamma_{Ms,c1}$	[-]	1,25				
Factor for annular gap	α_{gap}	[-]	0,5				
Pullout							
Characteristic resistance in cracked concrete	$N_{Rk,p,c1}$	[kN]	6,8	9,0	12,0	21,0	33,0
Concrete cone failure							
Effective anchorage depth	h_{ef}	[mm]	50	57	70	90	114
concrete edge cone	distance	$c_{cr,N}$	1,5 h_{ef}				
	spacing	$s_{cr,N}$	3 h_{ef}				
Installation factor	γ_{inst}	[-]	1,0				
Concrete pryout failure							
k-Factor	k_B	[-]	1,0	2,0			
Concrete edge failure							
Effective length of the anchor	$l_f = h_{ef}$	[mm]	50	57	70	90	114
Effective diameter-Ø	d_{nom}	[mm]	8	10	14	18	

MULTI-MONTI-plus

Performance
Characteristic value for seismic actions C1 and C2

Annex C 3

Table C3.2: Characteristic values for seismic actions C2 MMS-plus carbon steel ¹⁾

Size MMS-plus			16	20
Steel failure for tension- and shear load				
Embedment depth	h_{nom}	[mm]	115	140
Steel failure for tension- and shear load				
Characteristic resistance and partial safety factor	$N_{Rk,s,c2}$	[kN]	100,0	142,7
	$\gamma_{Ms,c2}$	[-]	1,5	
	$V_{Rk,s,c2}$	[kN]	27,6	57,2
	$\gamma_{Ms,c2}$	[-]	1,25	
Factor for annular gap	α_{gap}	[-]	0,5	
Pullout				
Characteristic resistance in cracked concrete	$N_{Rk,p,c2}$	[kN]	14,0	18,1
Concrete cone failure				
Effective anchorage depth	h_{ef}	[mm]	90	114
concrete edge cone distance	$c_{cr,N}$	[mm]	1.5 h_{ef}	
	$s_{cr,N}$	[mm]	3 h_{ef}	
Installation safety factor	γ_{inst}	[-]	1,0	
Concrete pryout failure				
k-Factor	k_8	[-]	2,0	
Concrete edge failure				
Effective length of the anchor	$l_f = h_{ef}$	[mm]	90	114
Effective diameter-Ø	d_{nom}	[mm]	14	18

¹⁾ displacements $\bar{\delta}_{N,c2}$ and $\bar{\delta}_{V,c2}$ are not assessed

MULTI-MONTI-plus

Performance
Characteristic value for seismic actions C1 and C2

Annex C 4

Table C4: Characteristic values under fire exposure MMS-plus carbon steel

Size MMS-plus			6		7,5		10		12		16		20	
Embedment depth	h_{nom}	[mm]	35	45	35	55	50	65	75	90	100	115	140	
Characteristic resistance for tension and shear / $F_{Rk,fi} = N_{Rk,s,fi} = N_{Rk,p,fi} = V_{Rk,s,fi}$														
Characteristic resistance	R30	$F_{Rk,fi}$	[kN]	0,3	0,4	0,5	1,1	1,4	2,3	3,0	3,9	5,0	7,5	11,0
	R60	$F_{Rk,fi}$	[kN]	0,3	0,4	0,5	0,8	1,4	1,4	2,1	2,1	4,5	4,5	7,7
	R90	$F_{Rk,fi}$	[kN]	0,3	0,4	0,5	0,5	1,0	1,0	1,5	1,5	3,3	3,3	5,6
	R120	$F_{Rk,fi}$	[kN]	0,2	0,3	0,4	0,4	0,8	0,8	1,2	1,2	2,6	2,6	4,5
	R30	$M^0_{Rk,s,fi}$	[Nm]	0,5		1,1		2,7		5,3		16,4		36,6
	R60	$M^0_{Rk,s,fi}$	[Nm]	0,3		0,6		1,5		2,8		8,9		19,8
	R90	$M^0_{Rk,s,fi}$	[Nm]	0,2		0,4		1,1		2,0		6,4		14,2
	R120	$M^0_{Rk,s,fi}$	[Nm]	0,2		0,3		0,9		1,6		5,1		11,4
Edge distance														
R30 bis R120		$C_{cr,fi}$	[mm]	2 h_{ef}										
Spacing														
R30 bis R120		$s_{cr,fi}$	[mm]	2 $C_{cr,fi}$										

Table C5: Characteristic values under fire exposure MMS-plus stainless steel

Size MMS-plus			7,5			10		12	
Embedment depth $h_{nom,standard}$		[mm]	40	55	75	70	85	100	115
Embedment depth $h_{nom,reduced}$		[mm]	35	50	65	60	75	90	105
Characteristic resistance for tension and shear									
/ $F_{Rk,fi} = N_{Rk,s,fi} = N_{Rk,p,fi} = V_{Rk,s,fi}$									
	R30	$F_{Rk,fi}$	[kN]	0,5	1,1	1,4	2,3	3,0	3,9
	R60	$F_{Rk,fi}$	[kN]	0,5	0,8	1,4	1,4	2,1	2,1
	R90	$F_{Rk,fi}$	[kN]	0,5	0,5	1,0	1,0	1,5	1,5
	R120	$F_{Rk,fi}$	[kN]	0,4	0,4	0,8	0,8	1,2	1,2
	R30	$M^0_{Rk,s,fi}$	[Nm]	1,1		2,7		5,3	
	R60	$M^0_{Rk,s,fi}$	[Nm]	0,6		1,5		2,8	
	R90	$M^0_{Rk,s,fi}$	[Nm]	0,4		1,1		2,0	
	R120	$M^0_{Rk,s,fi}$	[Nm]	0,3		0,9		1,6	
Edge distance									
R30 - R120		$C_{cr,fi}$	[mm]	2 h_{ef}					
Spacing									
R30 - R120		$s_{cr,fi}$	[mm]	2 $C_{cr,fi}$					

MULTI-MONTI-plus

Performance
Characteristic values under fire exposure

Annex C 5

Table C6: Displacements under tension loads MMS-plus carbon steel

Size MMS-plus			6		7,5		10		12		16		20
Embedment depth	h_{nom}	[mm]	35	45	35	55	50	65	75	90	100	115	140
Tension load uncracked concrete	N	[kN]	1,9	3,0	1,9	5,3	5,7	7,9	10,7	12,8	16,2	20,1	29,3
Displacement	$\bar{\delta}_{N0}$	[mm]	0,1	0,1	0,1	0,1	0,1	0,1	0,1	0,2	0,1	0,1	0,1
	$\bar{\delta}_{N\infty}$	[mm]	0,3	0,3	0,4	1,1	0,8	0,7	0,7	0,6	0,1	0,1	0,1
Tension load cracked concrete	N	[kN]	0,5	0,7	0,9	2,0	2,9	4,3	5,7	6,4	9,5	14,2	20,9
Displacement	$\bar{\delta}_{N0}$	[mm]	0,1	0,1	0,1	0,1	0,1	0,1	0,1	0,1	0,1	0,1	0,1
	$\bar{\delta}_{N\infty}$	[mm]	0,1	0,1	0,1	0,1	0,1	0,1	0,1	0,2	1,4	1,4	0,7

Table C7: Displacements under tension loads MMS-plus stainless steel

Size MMS-plus			7,5			10		12	
Embedment depth $h_{nom,standard}$		[mm]	40	55	75	70	85	100	115
Embedment depth $h_{nom,reduced}$		[mm]	35	50	65	60	75	90	105
Tension load uncracked concrete	N	[kN]	2,4	2,1	6,2	5,7	9,5	9,5	14,3
Displacement	$\bar{\delta}_{N0}$	[mm]	1,4	1,3	2,5	2,3	2,7	10,3	3,7
	$\bar{\delta}_{N\infty}$	[mm]	2,1	1,9	3,8	3,5	4,0	15,9	5,5
Tension load cracked concrete	N	[kN]	1,4	0,7	1,9	2,9	4,3	5,7	7,6
Displacement	$\bar{\delta}_{N0}$	[mm]	1,3	0,2	0,3	0,6	0,5	1,3	1,4
	$\bar{\delta}_{N\infty}$	[mm]	1,9	0,3	0,5	0,9	0,8	1,9	2,2

MULTI-MONTI-plus

Performance
Displacements under tension loads

Annex C 6

Table C8: Displacements under shear loads MMS-plus carbon steel

Size MMS-plus			6		7,5		10		12		16		20
Embedment depth	$h_{no,m}$	[mm]	35	45	35	55	50	65	75	90	100	115	140
Shear load uncracked concrete	V	[kN]	2,0		4,0		8,0		12,0		22,6		42,8
Displacement	δ_{V0}	[mm]	0,1	0,1	0,1	0,1	0,2	0,1	0,2		2,9		3,4
	$\delta_{V\infty}$	[mm]	0,2	0,2	0,1	0,2	0,2	0,2	0,3		4,4		5,1

Table C9: Displacements under shear loads MMS-plus stainless steel

Size MMS-plus			7,5			10		12	
Embedment depth $h_{nom,standard}$		[mm]	40	55	75	70	85	100	115
Embedment depth $h_{nom,reduced}$		[mm]	35	50	65	60	75	90	105
Shear load uncracked concrete	V	[kN]	3,9	4,8	6,2	8,1	12,9	10,5	12,4
Displacement	δ_{V0}	[mm]	2,7	3,5	3,1	2,7	3,3	3,2	3,3
	$\delta_{V\infty}$	[mm]	4,0	5,3	4,6	4,1	4,9	4,8	5,0

MULTI-MONTI-plus

Performance
Displacements under shear loads

Annex C 7



HECO-Schrauben GmbH & Co.KG

Dr.-Kurt-Stein-Straße 28 · D-78713 Schramberg

Tel.: +49 (0) 74 22 / 9 89-0 · Fax: +49 (0) 74 22 / 9 89-200

Mail: info@heco-schrauben.de · www.heco-schrauben.de