



CABR-3D-004

CABR-3D

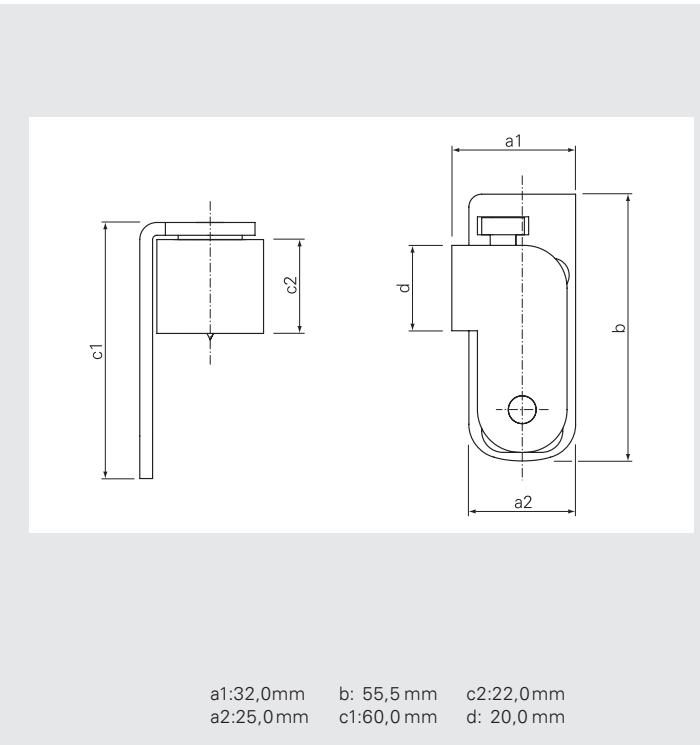

Load capacity with 1 pair
80 kg

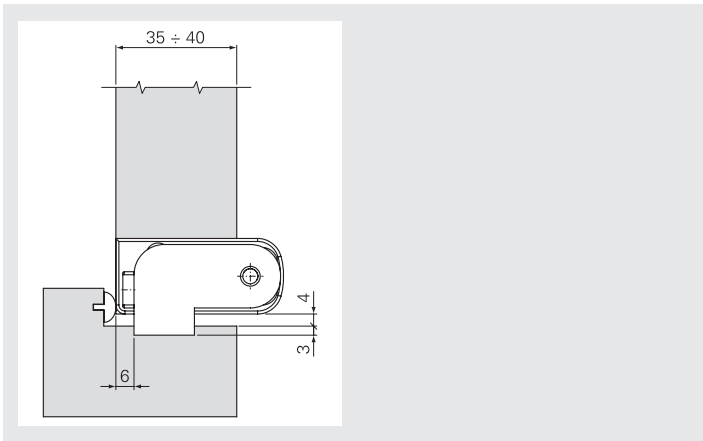

Raw Material
Steel/Zamak

Surface treatment	Corrosion resistance in accordance to standard UNI EN 1670
Copper min. 5µ Nickel min.15µ + Brass min. 0,15µ + painting(ZMT)	min. 24 hours (class 1)
Nickel min 5µ + Chrome min.15µ (ZCO)	min.140 hours (class 3)

The details stated are results of tests and/or calculations and therefore are non-binding and do not represent guaranties or warranted characteristics for not specified applications. All calculations therefore have to be checked and approved by the responsible planner ahead of execution. The user is responsible to assure compliance with all applicable laws and regulations.