



WTEC-3D-100-005 W-Tec 3D+ 100

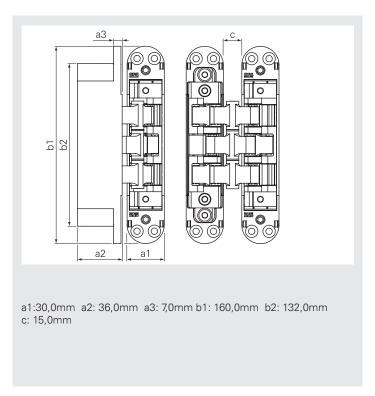



Load capacity with 2 hinges 80 kg

Raw Material Zamak

| Surface treatment | Corrosion resistance in accordance to standard UNI EN 1670 | | |
|---|--|--|--|
| Zinc coated min 5µ + protective (Zinc GSS) | min. 1000 hours (class 5) | | |
| Zinc coated min 5µ + painting (Matt Chrome) | min. 500 hours (class 5) | | |

Designation according to standards EN 1935

| | 3 | 7 | 4 | 1 | 1 | * | 0 | 11 | |
|--|---|---|---|---|---|---|---|----|--|
|--|---|---|---|---|---|---|---|----|--|

^{*} see corrosion resistance

© SFS, WTEC-3D+_100_09-2020, technical changes reserved