


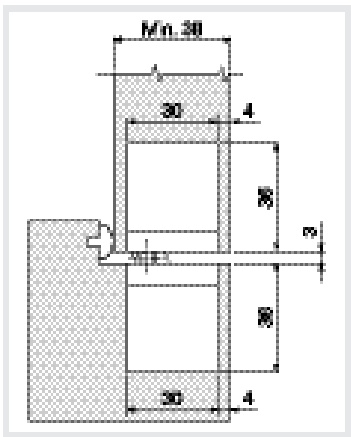


WTEC-3D-160-000

W-Tec 3D+ 160

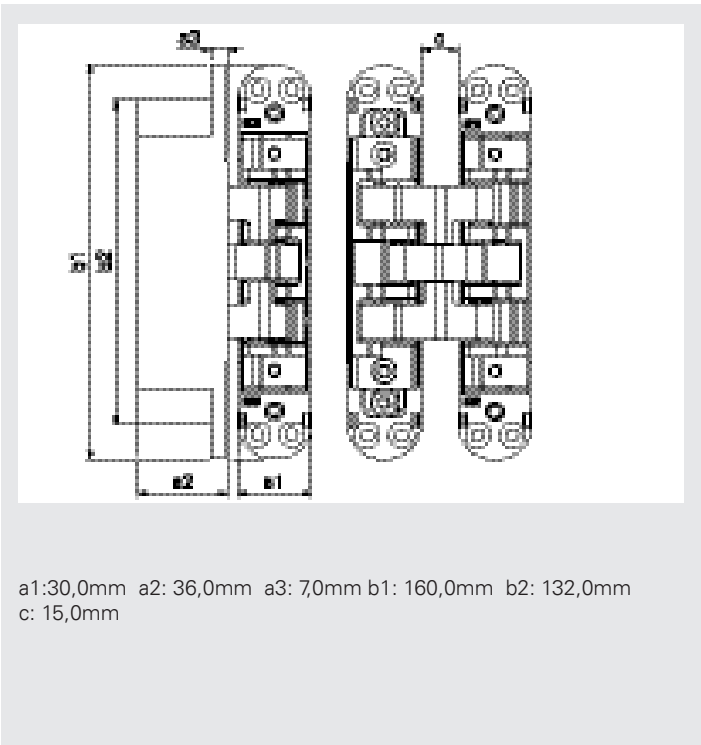

Load capacity with 2 hinges
120 kg

Raw Material
Steel
Zamak

Surface treatment	Corrosion resistance in accordance to standard UNI EN 1670
Zinc coated min 5µ + protective (Zinc GSS)	min. 1000 hours (class 5)
Zinc coated min 5µ + painting (Matt Chrome)	min. 500 hours (class 5)

Designation according to standards EN 1935

4	7	6	0	1	*	1	13
---	---	---	---	---	---	---	----

* see corrosion resistance

The details stated are results of tests and/or calculations and therefore are non-binding and do not represent guaranties or warranted characteristics for not specified applications. All calculations therefore have to be checked and approved by the responsible planner ahead of execution. The user is responsible to assure compliance with all applicable laws and regulations.