

# Hinges suitable for flush fit technical doors


#### Adjustable hinges for flush fit doors

The Just 3D hinge has been developed to meet the requirements of both public and private sectors, to have a flush fit adjustable hinge technically state of the art.

Just 3D is easy to fit and to adjust: +/-2,5mm in height, horizontal and gasket pressure. Adjustment is simple and can be carried out by one person using a 4mm Allen key.

Just 3D is not only aesthetically pleasing and fully adjustable, it also offers a guarantee of long term, trouble free functionality.

Self lubricating bushes ensure smooth, long term operation, which has been tested in accordance with EN 1935. Just 3D has achieved a load rating of 140 Kg in this test.

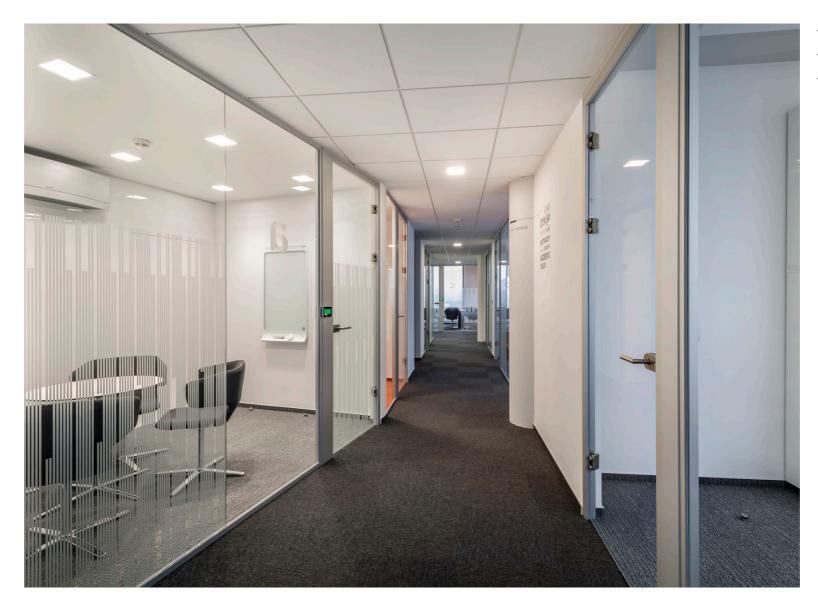

Just 3D on timber 4

Just 3D on steel 8

Just 3D for glass doors 12

2 SFS | Hinge technology | SFS

## Just 3D adjustable hinge

For application on solid timber and cover frames.

Being of symmetrical design, Just 3D suits both left and right handed applications. Security screws ensure suitability for both internal and external doors.

The range of components, enables Just 3D to be applied to steel, solid timber and cover frames. A steel support will be supplied for cover frame applications, which must be fastened on the back of the frame.


To give doors more added value, all visible components can be produced in stainless steel. The steel version is available in zinc and matt nickel finishes.






### **Description & Accessories**

### Just 3D



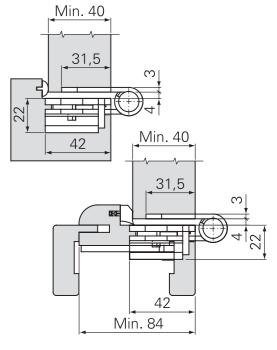

Ordering codes	Just 3D	Finish	Packag- ing el 2 pcs.	
1272308	J3DS001/01XS	Brushed Stainless Steel		
777656	J3DS001/01NO	Matt Nickel 2 pc		
1272307	J3DS001/01SZ	Zinc	2 pcs.	

Load capacity	Just 3D
2 hinges	140 kg



1361197	Milling jig for sash
1272108	Milling insert for sash
1272107	Milling jig for frame



Ordering code support for cover	Finish	Packag- ing	
frame			
777659	Zinc	20 pcs.	



# Just 3D adjustable hinge

### For application on steel frames

Just 3D for steel frames has the same technical and adjustment characteristics of the other versions.

Just 3D has been fitted on hospital the doors and public environments both in Italy and abroad, fully satisfying the needs of customers.


Le Just 3D has been tested on fire doors and certified from the IFT institute in Rosenheim.






### **Description & Accessories**


#### **Just 3D**

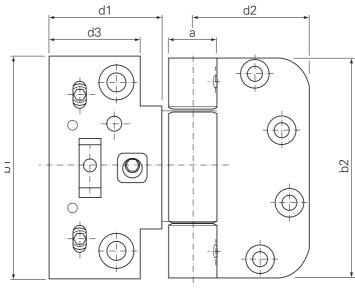



Ordering codes	Just 3D	Finishing	Packag-	
1272306	J3DS000XS	Brushed Stainless Steel	2 pcs.	
777653	J3DS000NO	Matt Nickel	2 pcs.	

Load capacity	Just 3D
2 hinges	140 kg





# **Just 3D** adjustable hinge


### For glass doors

Just 3D for glass doors increases the range of this product.

By keeping all the adjustment characteristics in the three dimensions of the other applications, this hinge has been designed to be applied on flush door frames from 40 to 44 mm.

For a correct application, the door can be 8/10/12 mm thick.


Besides the jigs, identical for all applications, a specific key is available for tightening the stud correctly.

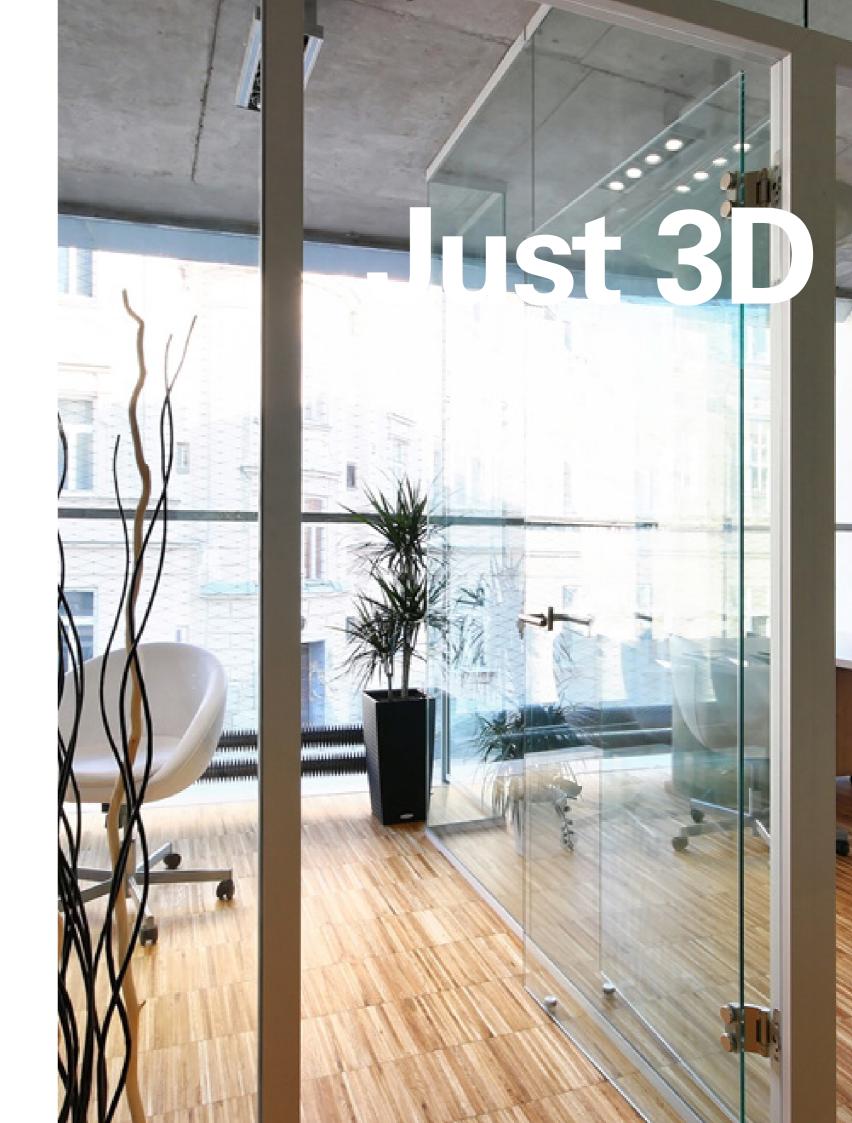



### **Description & Accessories**

### Just 3D

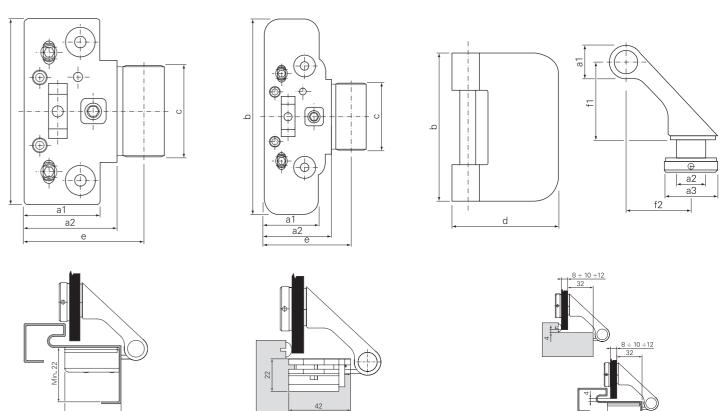

Ordering code sash	Just 3D	Finishing	Packag- ing	
1272306	J3DS000XS	Brushed stainless steel 2		
777653	J3DS000NO	Matt Nickel 2 p		
Ordering code steel frame				
1334376	J3DHM00XS	Brushed stainless steel 2 p		
1334375	J3DHM00NO	Matt Nickel 2 pc		
Ordering code timber frame				
1334378	J3DHMT01XS	Brushed stainless steel 2 pcs.		
1334377	J3DHMT01NO	Matt Nickel 2 pcs.		







Ordering code support for steel frame	Finishing	Packag- ing
1272302	Zinc	20 pcs.



© SFS , 03/2020 HT\_BR\_905307\_en Technical changes reserved